
E 232 STAIRCASE LIGHTING TIME-DELAY SWITCHES

E 232 E-230N

Installation manual

E 232 E-230N
Installation Manual
Document ID: 9AKK108466A2386
2025-09-19

Disclaimer

The information in this document is subject to change without notice and should not be construed as a commitment by ABB AG – STOTZ-KONTAKT. ABB AG – STOTZ-KONTAKT assumes no responsibility for any errors that may appear in this document.

In no event shall ABB AG – STOTZ-KONTAKT be liable for direct, indirect, special, incidental, or consequential damages of any nature or kind arising from the use of this document, nor shall ABB AG – STOTZ-KONTAKT be liable for incidental or consequential damages arising from use of any software or hardware described in this document.

Copyrights

This document and parts thereof must not be reproduced or copied without written permission from ABB AG – STOTZ-KONTAKT, and the contents thereof must not be imparted to a third party nor used for any unauthorized purpose. The software or hardware described in this document is furnished under a license and may be used, copied, or disclosed only in accordance with the terms of such license.

© Copyright 2025 ABB AG – STOTZ-KONTAKT. All rights reserved.

Trademarks

ABB AG – STOTZ-KONTAKT is a registered trademark of the ABB Group. All other brand or product names mentioned in this document may be trademarks or registered trademarks of their respective holders.


Contact

ABB AG – STOTZ-KONTAKT
Eppelheimer Str. 82
DE-69123 Heidelberg
go.abb/contact




Warning! Installation by person with electrotechnical expertise only.


1. Connection diagram: 3 conductors

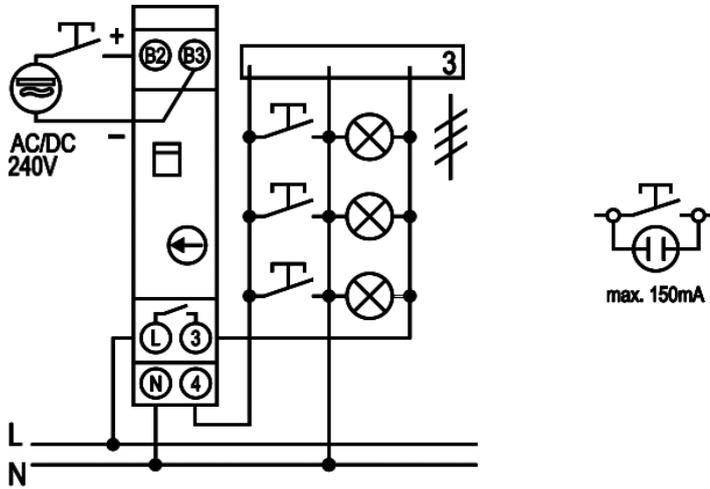


Tightening torque and stripping length



2. Connection diagram: 4 conductors

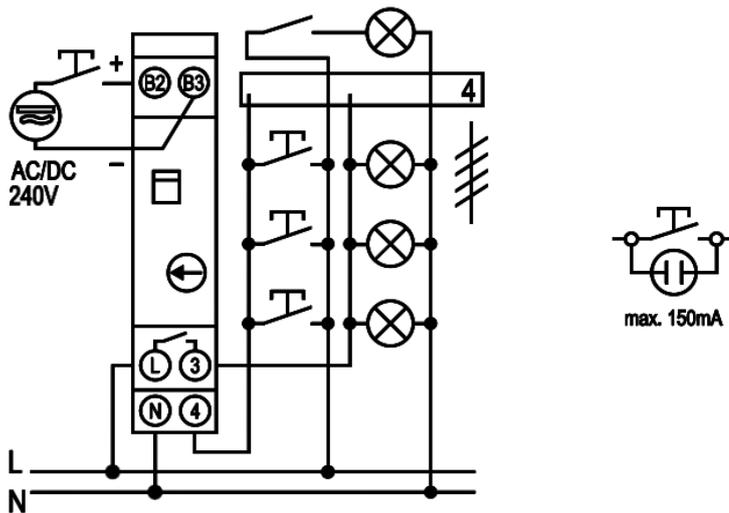

Tightening torque and stripping length



3. Technical data

Technical features	
	E 232E-230N
Time range (stepless)	0.5 – 20 min. stepless
Control voltage 230 V AC	■
Universal voltage in addition	
Glow lamp load	150 mA
3/4 conductor operated	automatically
Resettable	■
Steady-light switch	■
Advance warning acc. DIN 18015-2	
Long-time range of 60 min.	
Multi-functional (10 functions)	
Rated voltage	240 V AC
Rated Frequency	50 / 60 Hz
Control voltage range	0.85 ... 1.1 Un
Power loss	6 VA
Rated switching capacity	16 A, 230 V AC
Filament lamps	2,300 W
Halogen lamps	2,300 W
Fluorescent lamps series compensated / uncorrected	2,300 VA
Fluorescent lamps inductive or capacitive	2,300 VA
Fluorescent lamps shunt compensated	400 VA (42 μ F)
Electronic controlgear	9x7 W, 7x11 W, 7x20 W, 7x23 W
Inductive load ($\cos \varphi = 0.6/230$ V AC)	2,300
Contact material	AgSnO ₂
Contact gap	< 3 mm
Mech. serviceable life	> 10 ⁷
Serviceable life at rated load, $\cos \varphi = 1$	> 2x10 ⁵
Serviceable life at rated load, $\cos \varphi = 0.6$	> 4x10 ⁴
Max. terminal cross-section	13 mm ²
Max. conductor cross-section	4 mm ²
ON duration	100 %
Ambient temperature	- 25 °C to + 50 °C
Housing and insulation material	heat resistant, self-extinguishing thermoplast
Control current at 230 V AC	26 mA
Minimum command duration	20 ms